

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 36 TOWNSHIP 16 RANGE 2

DATE: 10-26-07

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Cut 'x' in concrete desk Ed:



METHOD OF ESTABLISHMENT: County: 1-02-02

IN. S.P.C. E ZONE NAD '83

NAME: 16023608

N: 503235.4560(m)

E: 49166.8170(m)

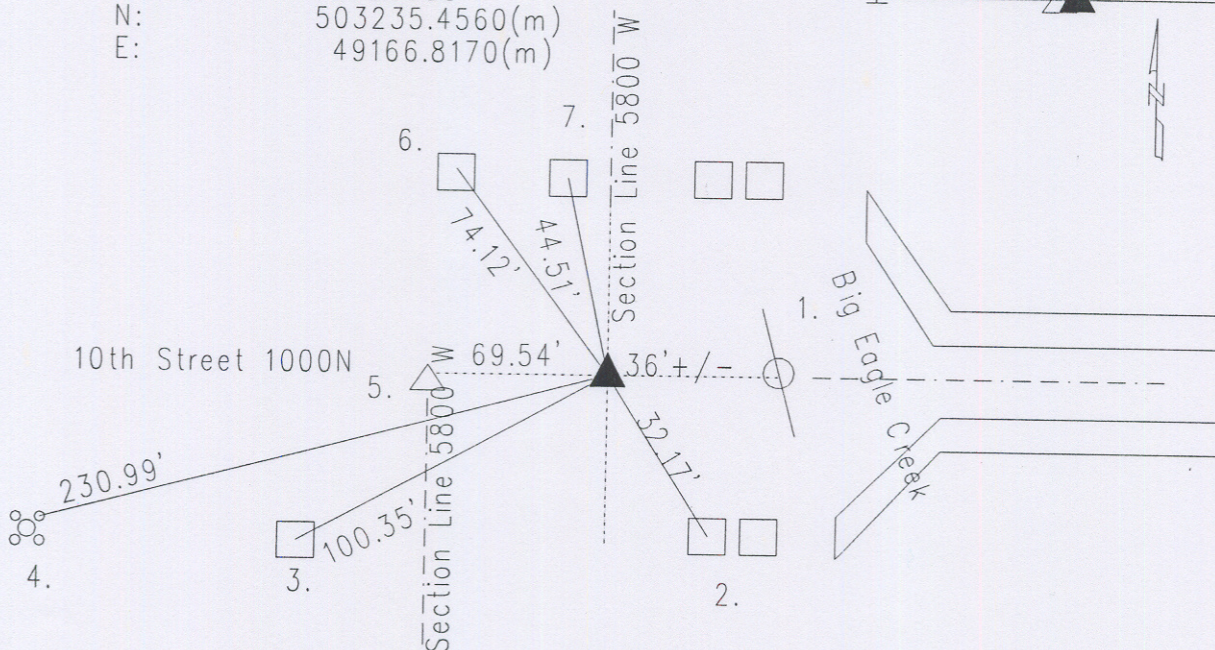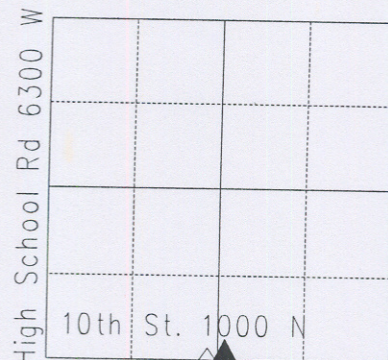

Original post set 1820 by Wm. B. Laughlin with witness: 20" white ash S 45 W 4 links; 6" beech S 45 E 7 links per Marion County Atlas pg. 3. Survey by Fatout 10-28-1881 indicates a set rock 27 feet N on the line per Wayne Township Legal Survey Book pg. 56. Schmidt 4-26-62 called a cut 'x' in pavement. Schmidt 11-21-43 called the same. Miller 2-9-77 called a chiselled cross. Gries 7-5-88 called a shiselled cross. Greene 4-5-90 called same. Wilcoxon 10-27-92 called a PK nail w/washer. Excavated 10-18-99 by Wilcoxon and Harrison set per GPS coord's. An old hub was fd lying on its side 20" down. NOTE: As of 01-02-02 the Harrison set as the corner is considered in the WRONG location and should NOT be used. New ties were taken. Re-tied 10-26-07 by Wilcoxon.

16023608

REF.	DISTANCE	DESCRIPTION
1.	36' +/-	Due E to expansion joint
2.	32.17'	Mag nail w/bw top wooden guard rail post
3.	100.35'	Mag nail w/bw top wooden guard rail post
4.	230.99'	Cut 'x' NE bolt of light pole base
5.	69.54'	Due W to N Q 1-15-2 survey mark nail
6.	74.12'	Mag nail w/bw top wooden guard rail post
7.	44.51'	Mag nail w/bw top wooden guard rail post